



LKT 150



LKT Ltd.
Oravická 1965/62
028 01 Trstená, Slovakia
lkt@lkt.sk
lktholding.eu

Dealer:



**FOREST
PIONEER**



LKT150 Technical parameters

Engine :

- CUMMINS B4.5, EU Stage V
- Power: 149 kW (200HP) at 2500 rpm
- Max. torque: 780 Nm at 1500 rpm
- Diesel engine: 4,5l, 4-stroke with turbocharger, 4-cylinders

Transmission:

- Danfoss hydrostatic, axial regulation pump, drive automatics
- Two-gears hydraulic transfer case with 2 hydromotors (work/travel)

Axles:

- Planetary rigid axles mounted on front and rear frame
- Front and rear differential locking electro-hydraulically operated

Brake:

- 2-circuit brake, disk brake running in an oil bath
- disc brakes operated by brake cylinders with electro-hydraulic parking brake (spring-loaded)

Steering:

- Articulated fully hydraulic servo steering with 2 hydraulic cylinders
- 43° steering angle

Tank capacity:

Diesel: 140 l / AdBlue: 17 l / Hydraulic oil: 155 l

Hydraulic system:

- Load sensing hydraulic work pump Danfoss
- Flow rate 235 l/min at 1600 rpm and pressure up to 350 bar

Cabin:

- Comfort ROPS, FOPS, OPS tested safety cab
- HVAC: Heating, Ventilation and preparation for Air Conditioning
- Seat: comfort, heated, with air suspension, rotating workstation with mechanical swivel

Instruments and Electric system:

- 10-inch wide screen colour displayDanfoss DM1000
- Voltage: 24V
- Alternator: 70A/28V
- Batteries: 12V/50Ah - 2 pcs
- Starter: 4 kW/24V

Winch:

- Series: 2x80 kN, double drum with free unwinding of the rope, electro-hydraulically operated
- Rope diameter/length: 12mm/90m or 13mm/75m

Tyres:

- Series: 23,1-26

Standard equipment:

- Front blade, 2239 mm wide
- Rear shield tiltable, rocker arm system, hydraulically operated
- Frames: pivoting of the frames through axial bearing, hydraulic lock

Weight:

- 13.900 kg (Skidder r) / 15 .900 kg (Skidder w ith crane)

LKT 150 Optional equipment

Winch:

- **2x100 kN**,double drum winch, electro-hydraulic operation rope diameter/ length: 12mm/90m or 13mm/75m
- **2x120 kN**, double drum winch, electro-hydraulic operation rope diameter/ length: 12mm/140m or 13 mm/120m
- **2x135 kN**, double drum winch, electro-hydraulic operation rope diameter/ length: 12mm/130m or 13-14 mm/100m
- **2x165 kN**, double drum winch, electro-hydraulic operation rope diameter/ length: 12mm/130m or 13-14 mm/100m

Crane:



- **Epsilon Palfinger M90 R80** with a reach of 8,0 m
- **Epsilon Palfinger M90 R96** with a reach of 9,6 m
- **Epsilon Palfinger S110 R80** with a reach of 8,0 m
- **Epsilon Palfinger S110 R96** with a reach of 9,6 m
- **Epsilon Palfinger S120 R80** with a reach of 8,0 m
- **Epsilon Palfinger S120 R96** with a reach of 9,6 m
- **Epsilon Palfinger X130 R80** and **X130 R96**
- **Epsilon Palfinger grabs options:** FG 43S, FG 57X, FG 31R

Tyres:

- 28L-26 / c h a i n s available on request

LKT150 Additional equipment:

- Clambunk and rear shield options
- Toolboxes: on the front blade - storage boxes 2 pcs
- Front grapple teeth for logs manipulation
- Remote control: start - stop system, travel control of machine, winch, rear shield and throttle regulation
- Air-condition with independent cooler and ventilator
- Radio with USB port and 2 speakers
- Protective seat cover (LKT)
- Cabin protection with protective iron grid
- Shaded rear and rear side windows with increased abrasion resistance
- Shaded rear window and rear side windows, shatterproof ISO21876 KASIGLAS
- Side working LED lights on the cab 4x2 pcs
- Front camera and rear camera with monitor
- Telematics
- Coupler for trailer 14 t
- Electro-hydraulic quick couplings with rear outlet (for drive of attachments, drive and braking of trailer)
- Hydraulic oils – BIO oil instead of mineral oil
- Additional accessories on request

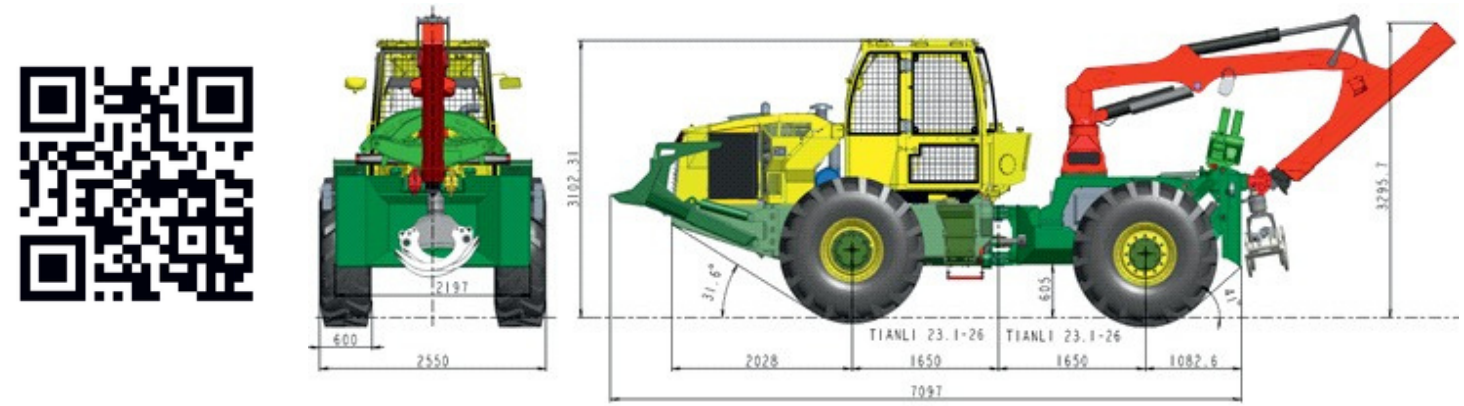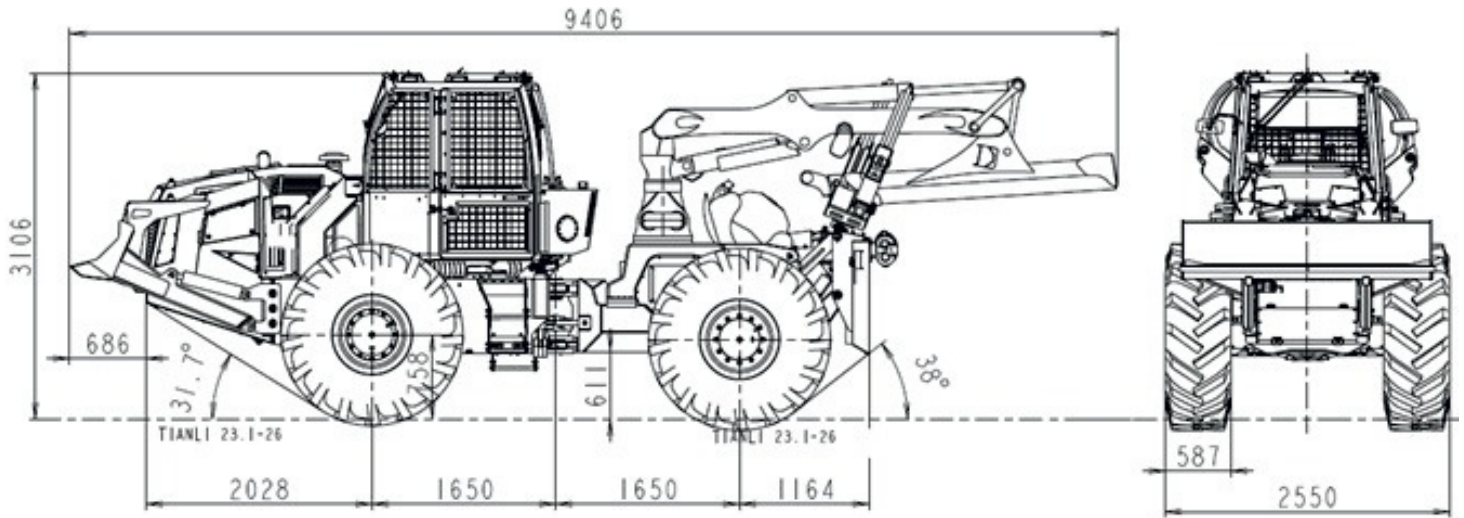

The products and specifications set forth in this brochure are subject to change without notice and LKT Holding, s.r.o. disclaims any and all liability for such changes.